


SERIE PEV-6 (Axial fan)



- Suitable to interchange the air in the rooms and for other specific industrial applications
- Accessories: ring made in painted steel, motor support made in tropicalized steel
- Number of blades: 6

TECHNICAL FEATURES:

- Electrical motor 4 poles, from 130 to 1104 W: Air flow from 350 to 15000 m³/h with Pressure until 40 mm H₂O
- Electrical motor 6 poles, from 184 to 368 W: Air flow from 600 to 10500 m³/h with Pressure until 20 mm H₂O

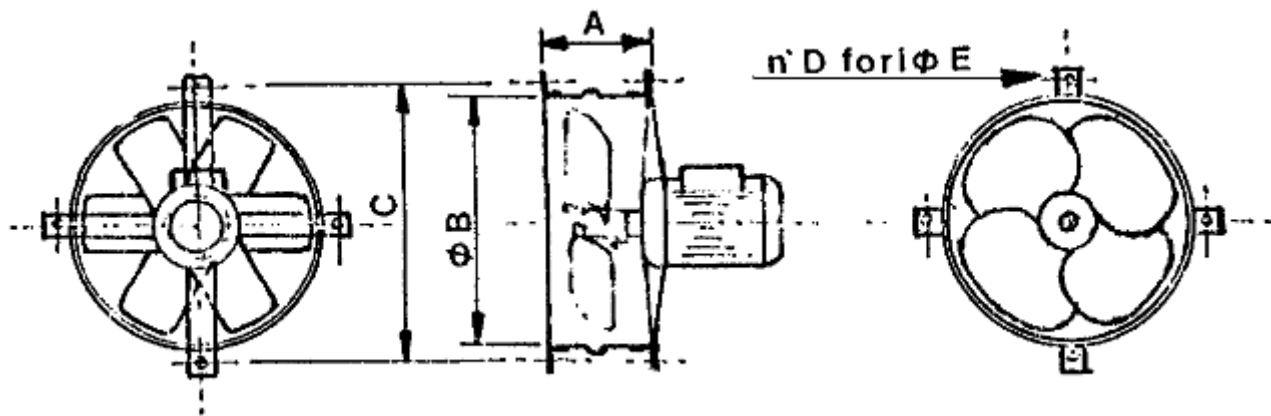


MODEL	PEV- 6 260	PEV- 6 310	PEV- 6 360	PEV- 6 410	PEV- 6 460	PEV- 6 510	PEV- 6 560	PEV- 6 610
A	80	100	100	130	130	150	150	150
B	270	320	370	420	470	530	580	630
C	295	345	395	445	495	555	605	655
D	4	4	4	4	4	4	4	4
E	7	7	7	7	7	7	7	7

MODEL		PEV- 6 260	PEV- 6 310	PEV- 6 360	PEV- 6 410	PEV- 6 460	PEV- 6 510	PEV- 6 560	PEV- 6 610
Rpm 1400	Hp	0,18	0,18	0,25	0,33	0,5	0,75	1	1,5
	W	130	130	184	243	368	552	736	1104
Min./ Max. Flow rate (m ³ /h)		350 / 1200	1300 / 2300	1000 / 3100	1000 / 4600	2400 / 5400	3000 / 9000	5000 / 12000	7000 / 15000
Max. pressure (mm H ₂ O)		10	10	20	20	20	30	30	40
Rpm 900	Hp	-	-	0,25	0,25	0,25	0,25	0,33	0,5
	W	-	-	184	184	184	184	243	368
Min./ Max. Flow rate (m ³ /h)		-	-	600 / 1800	1000 / 2600	1100 / 3200	2500 / 5000	2000 / 7000	4000 / 10500
Max. pressure (mm H ₂ O)		-	-	10	10	10	11	20	20

PEV-6

260

mm
H₂O

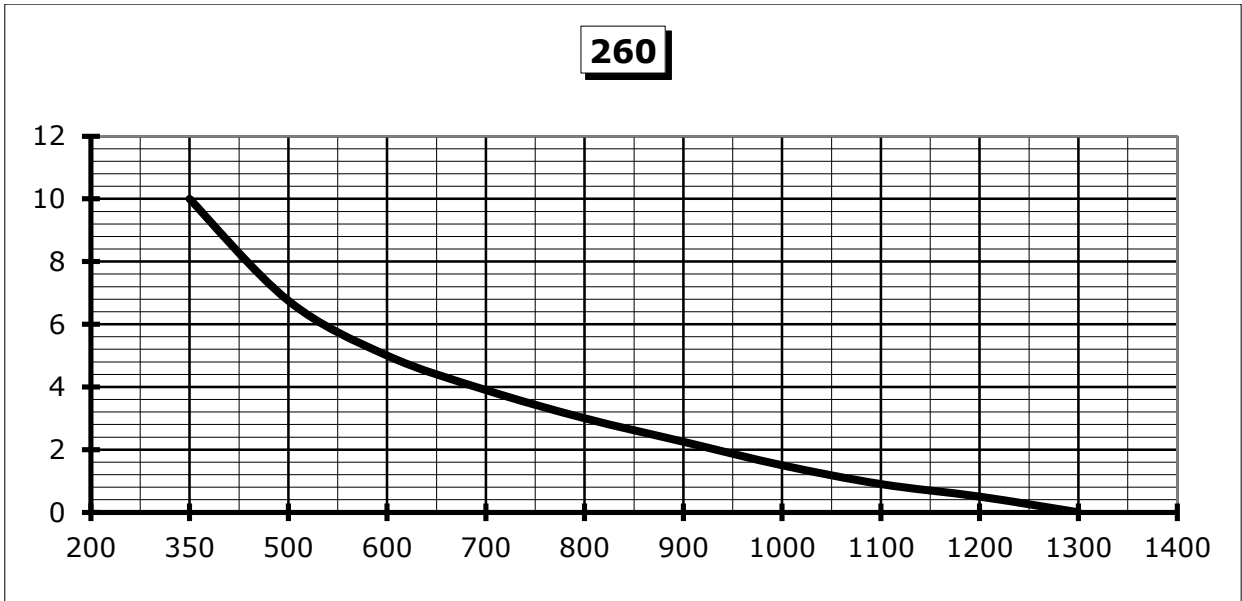


m³/h

PEV-6

310

mm
H₂O

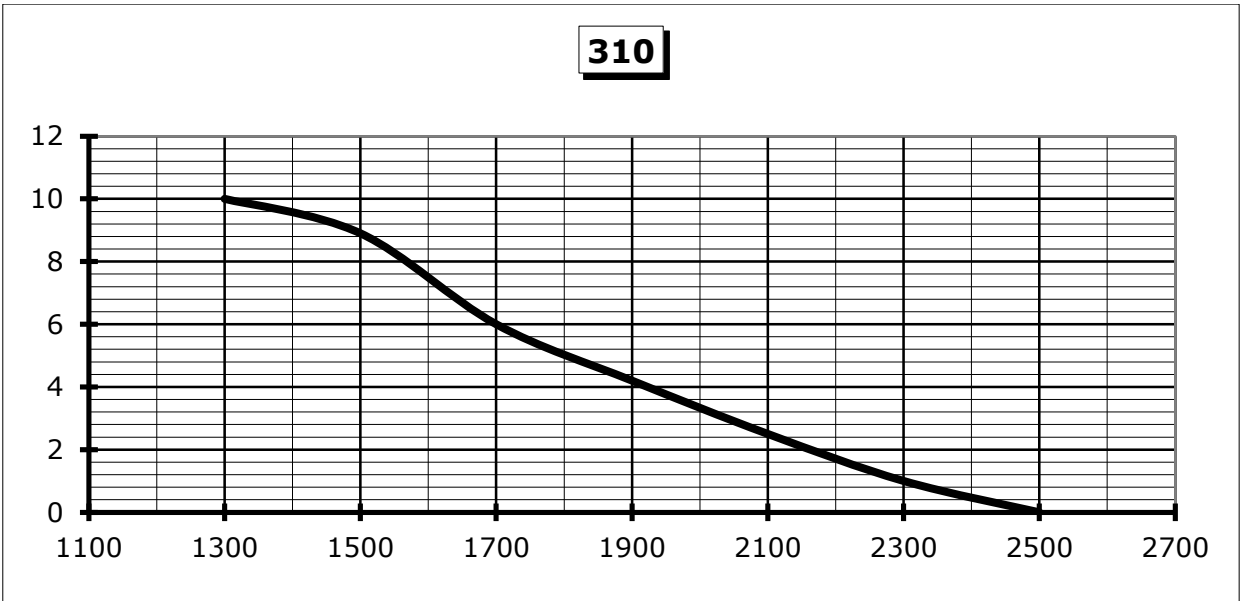


m³/h

PEV-6 360

mm
H₂O


1400 Rpm

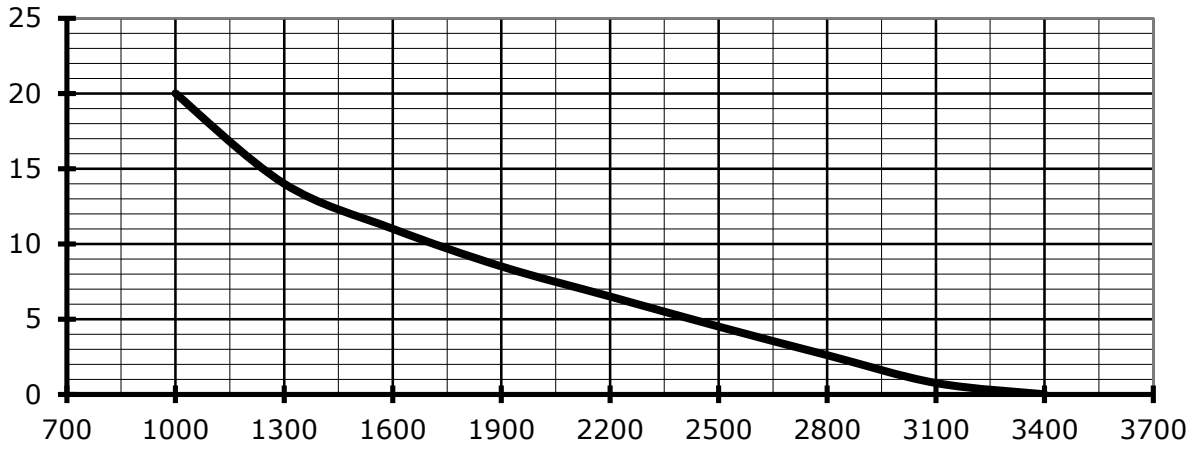

m³/h

mm
H₂O

900 Rpm

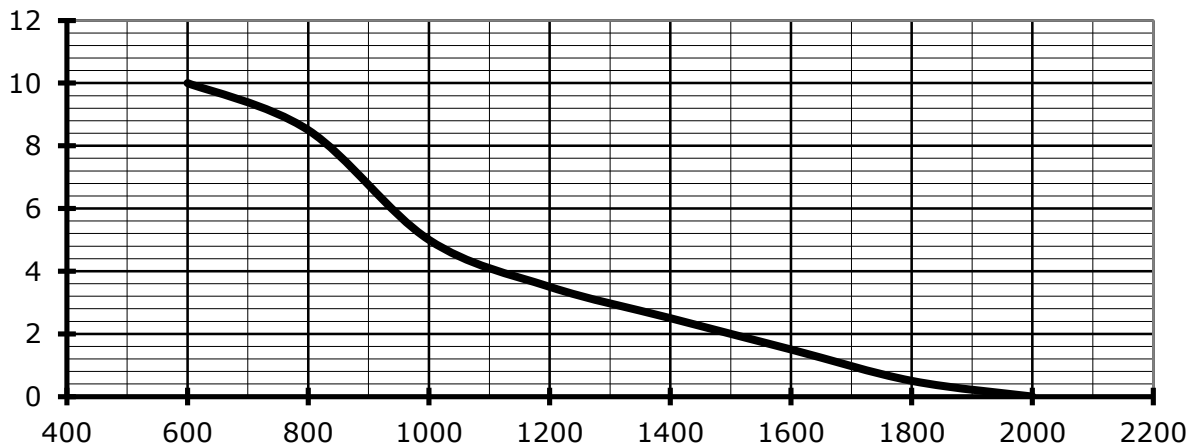


m³/h

PEV-6 410

mm
H₂O


1400 Rpm

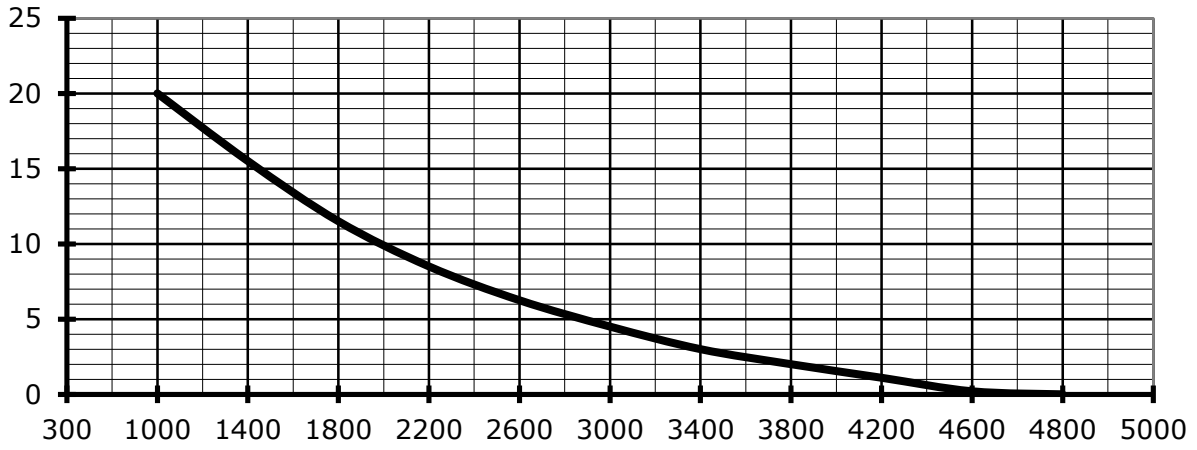

m³/h

mm
H₂O

900 Rpm

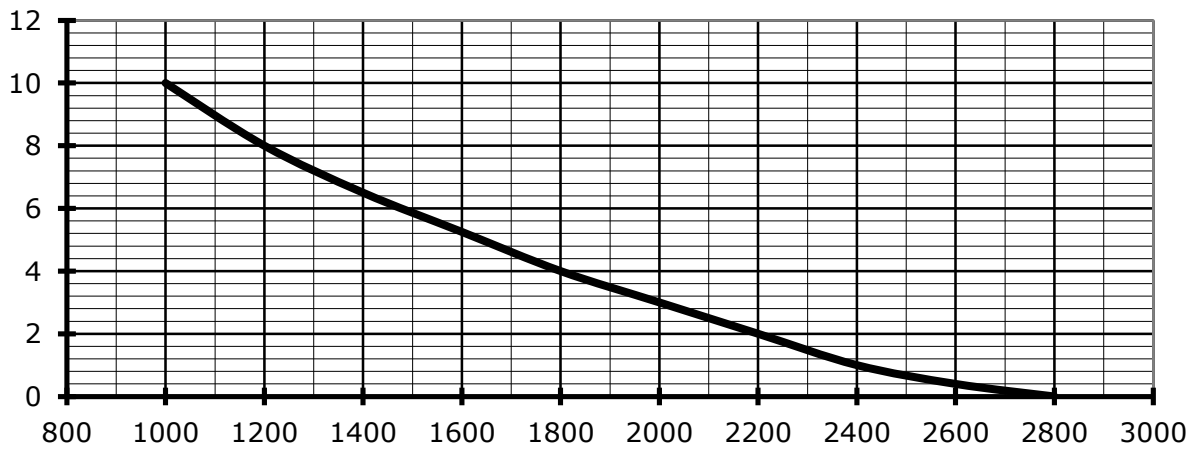


m³/h

PEV-6 460

mm
H₂O


1400 Rpm

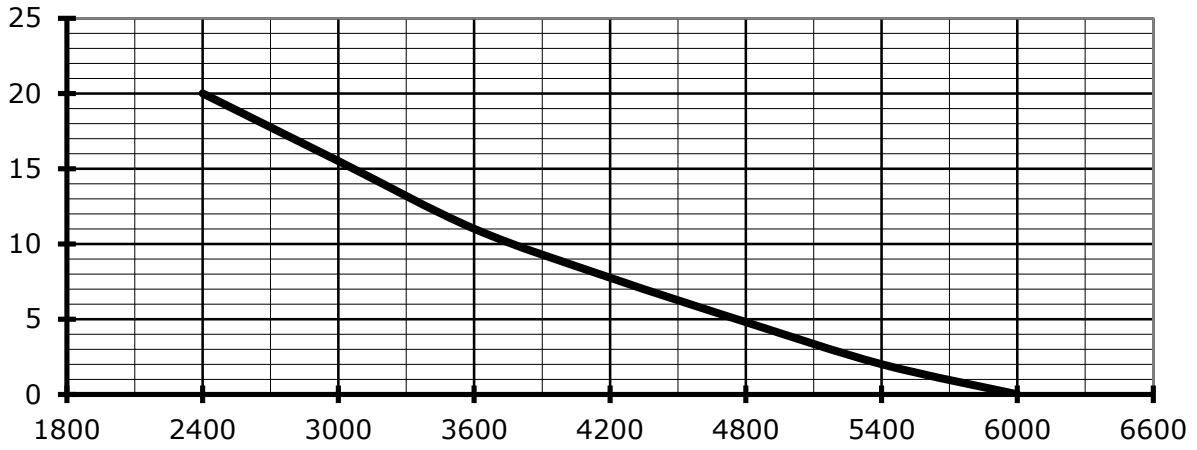

m³/h

mm
H₂O

900 Rpm

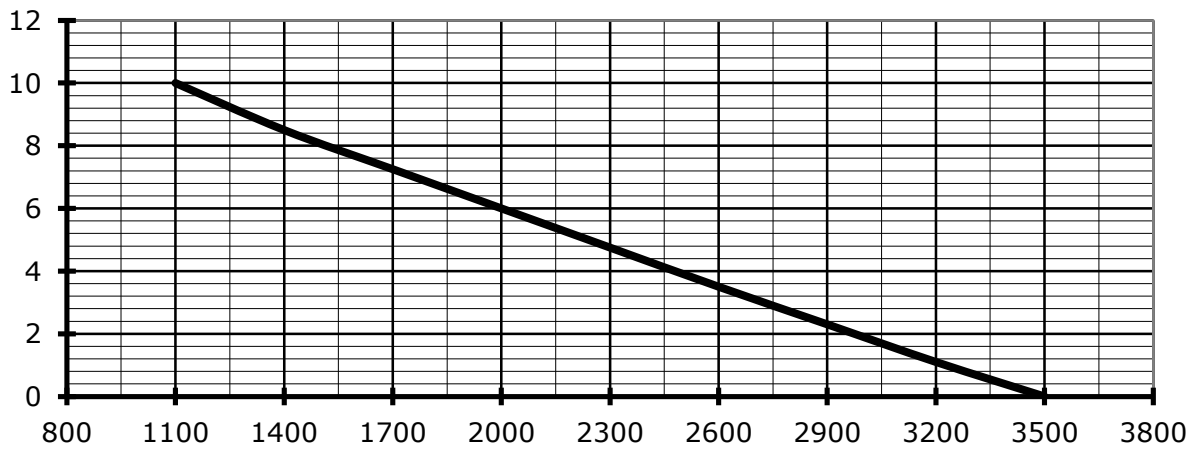


m³/h

PEV-6 510

mm
H₂O


1400 Rpm

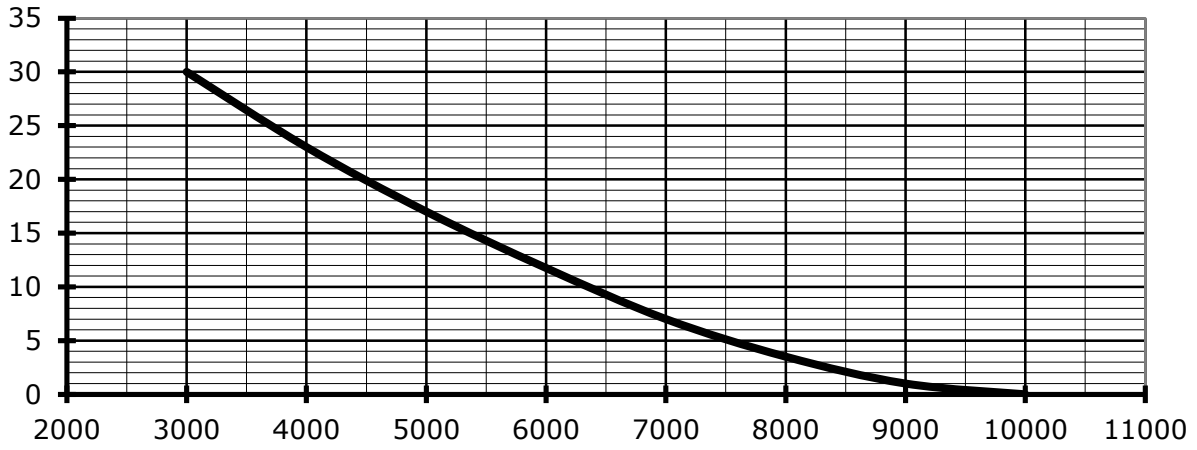

m³/h

mm
H₂O

900 Rpm

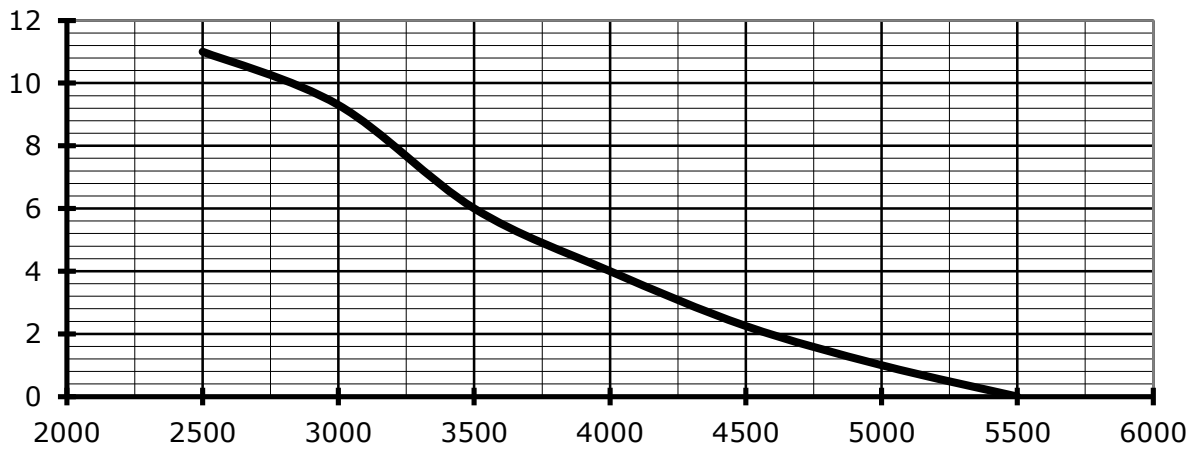


m³/h

PEV-6 560

1400 Rpm


mm
H₂O

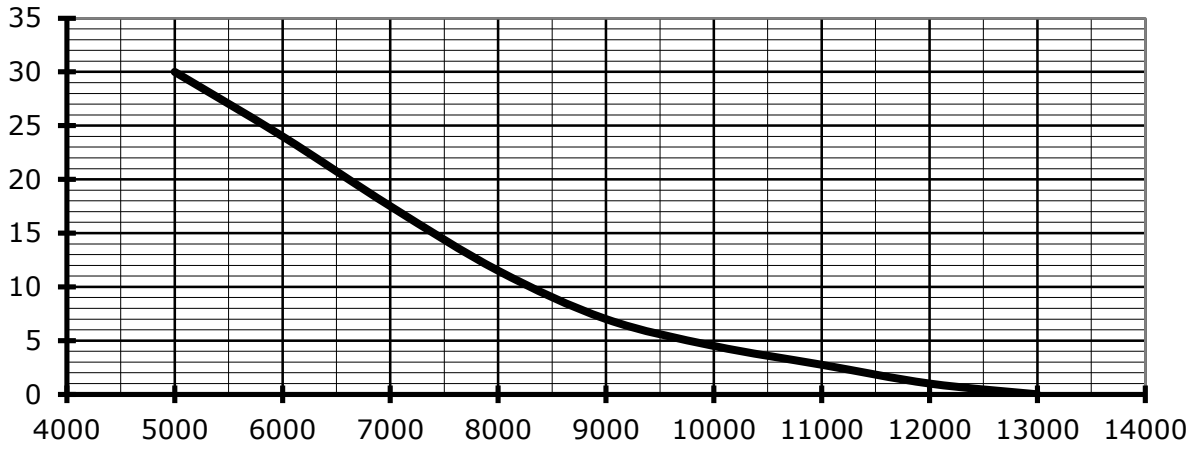

m³/h

900 Rpm

mm
H₂O

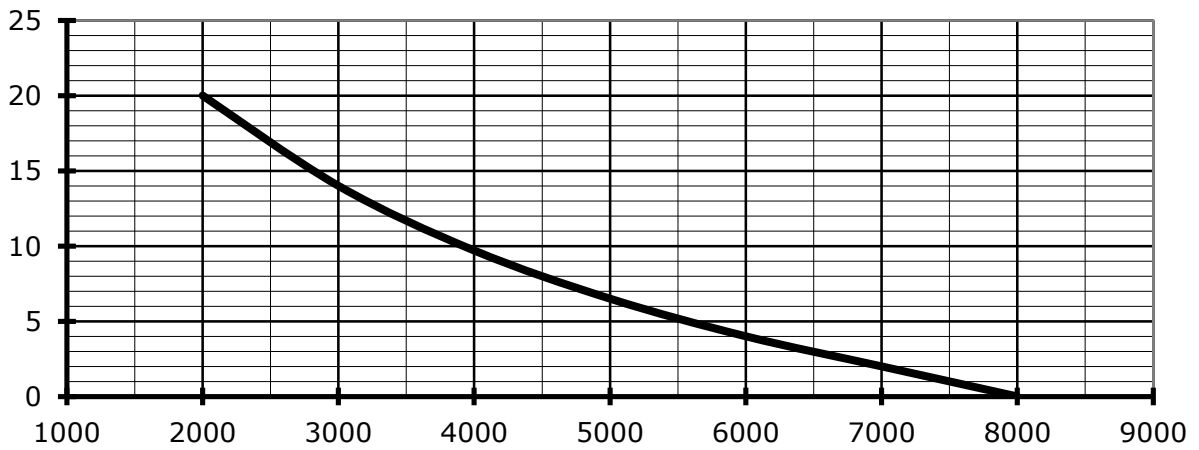


m³/h

PEV-6 610

1400 Rpm


mm
H₂O

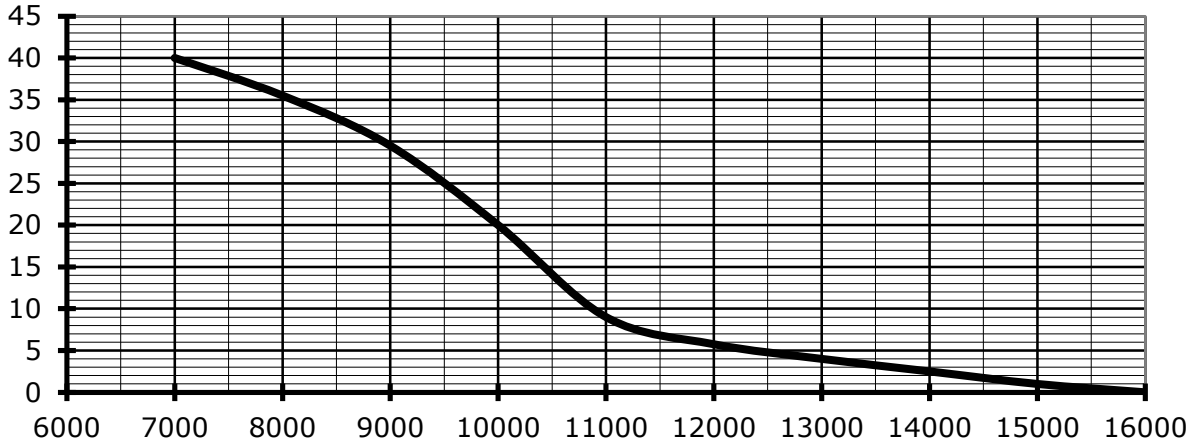

m³/h

900 Rpm

mm
H₂O

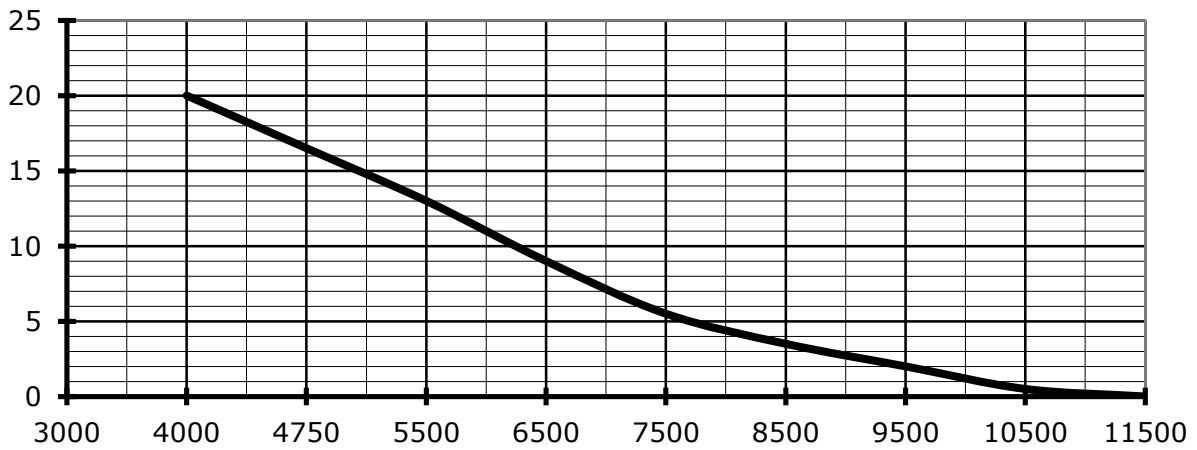

m³/h